



Introducing the MD-1001, a Microsoft® Windows® embedded tablet designed for professional applications.

SETTING-UP IP CAMERAS with PoE+ JUST GOT EASIER

Tablet Key Features

- Includes easy to use ONVIF viewing tool for accessing the camera view
- Download, access, and use any Windows-based applications
- Connect to networks using Wi-Fi, LAN, and 3G/GSM (mobile)
- Communicate while in the field with a built-in webcam, microphone and speakers
- Tote bag provides extra protection and securely holds the tablet; also includes a sunshield for visibility in sunlight areas
- Accessories include power car cord, AC adaptor, and Cat5 cross-over cable



PointSource Plus

- Rechargeable battery-powered Power over Ethernet (PoE) Plus Injector
- 802.3at PoE+ compliant delivering up to 25 Watts of PoE power



Veracity® PointSource™ Plus



MD-1001 with totebag



MD-1001



Veracity® PointSource Plus



TB-1001

Benefits


Trouble-free storage with 32GB solid-state drive (SSD)
 10.1" screen to see the camera view more clearly
 Rugged aluminum case for durability

Durable powered injector for powering POE IP cameras
 All cables are included

Durable denier nylon bag protects the MD-1001 tablet and provides a sun shield for viewing outdoors
 Includes neck strap for hands-free viewing

MD-1001 Tablet Specifications

MD-1001 Tablet Specifications		PointSource Plus Specifications	
LCD Display	10.1" with LED backlight	Charger	Three-stage intelligent (14.4V / 1A / 13.8V float)
Resolution	1024 x 600	Discharge Life	6 hours continuous for a 5 Watt camera (typ)
CPU	Intel Atom N455	Battery Type	Maintenance-free sealed lead-acid 12V, 3.4Ah
Memory	2GB DDR3 1333MHZ	Battery Module	Removable, rechargeable
Storage	32GB SSD (solid state drive)	Compliance	RoHS, Battery Directive compliant; CE, FCC, REACH exempt; IATA non-restricted (OK to transport by air)
Video Card	Intel GMA 3150	Dimensions	5 5/16" x 3 15/16" x 8 1/16" / 205 x 100 x 150mm (L x W x H)
Wireless Connectivity	802.11 b/g/n; Bluetooth 2.1	Operating Temp	32 ~ 122°F / 0 ~ 50°C Charge: 32 ~ 95°F / 0 ~ 35°C
Wired Connectivity	Ethernet with RJ45/USB dongle	Humidity	20% to 85%, non-condensing
Control Input	Resistive Touchscreen	Power Over Ethernet Plus (POE+) Output	IEEE 802.3af and 802.3at Compliant; 48V DC, 18 Watts (Max)
USB Ports	x2 USB2.0	Network Camera Port	x1 RJ45 port; 10/100BaseTX w/POE
Mobile Communication	1x SIM port, 3G(UWMTS) / GSM, 850/1900MHz	Network Port (pc)	x1 RJ45 port; 10/100BaseTX w/ data only (laptop connection) - no PoE
SD Card Port	Supports Micro SD Card	USB Connector	x1 USB Type A (power only - 5VDC 2.1A)
Operating Temp	41 ~ 95°F / 5 ~ 35°C	PoE Output	48VDC, IEEE
Humidity	35% ~ 85%	Weight	Net: 3.75 lbs / 1.7kg
Camera	Built-in 1.3MP		
Audio IN	Built-in Microphone		
Audio OUT	Built-in Speakers, Headphone Port		
Power Consumption	6.5 Watts		
Power	AC 100-240V ; DC 12V		
Weight	Net: 2 lbs / 0.9 kg; Gross: 3.7 lbs / 1.7 kg		

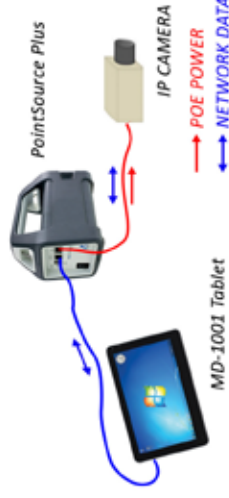

Specifications subject to change.