



LED-1910HDVB


This LED-backlit monitor with sunlight readability features the latest technology with enhanced picture clarity and sharpness for both analog and digital video signals.

Benefits

- High brightness enables clear viewing in direct sunlight areas
- Analog video is very clear with no detail loss
- 3D Comb Filter for better picture quality
- High contrast ratio for better picture definition
- Durable metal case housing

Accessories

- WM-32: Wall mount bracket (fixed/tilting)
- WM-302: Wall mount with swing arm & 4-way adjustable

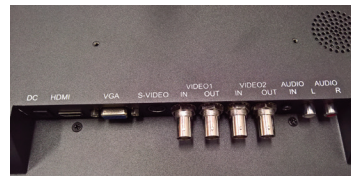

Specifications	
Mount	VESA 100 x 100mm
HD Compatible	Yes
Anti Glare Coating	Yes
Case	Durable Metal Housing
IR Remote Control	Yes
Native Aspect Ratio	5:4
Visible Screen Size (WH)	14.81" x 11.85" / 376.32 x 301.06mm
Resolution	1280(H) x 1024(V)
Brightness Rating	1,000 cd/m ²
Contrast Ratio	1000:1
Back Light	LED (30K)
Dot Pitch	0.294(H) x 0.294(V)mm
Color Depth	16.7 million
Number of Pixels	1,310,720
Response Time	5ms (Rising/Falling)
Audio Power / Speakers	2 Speakers x 2.5 Watts
Viewing Angle (L/R/T/B)	85/85/80/80 degrees
Digital Signal Processor	3D Comb Filter and noise reduction
Dimensions	15.96" x 13.5" x 1.9" / 405.4 x 343 x 48.3mm
Operating Temp	32 ~ 122°F / 0 ~ 50°C
Humidity	5% ~ 90%
Power Requirements	12 VDC (Includes ext. AC adapter)
Power Consumption	<20 Watts
Composite	x2 BNC Inputs / Outputs
VGA	x1 Input
HDMI	x1 Input
S-Video	x1 Input
Audio	x2 Inputs
Power	x1 2.1mm DC Input
Weight	Net: 3.97 lbs / 1.8 kg; Gross: 15.65 lbs / 7.1 kg

Specifications subject to change.