


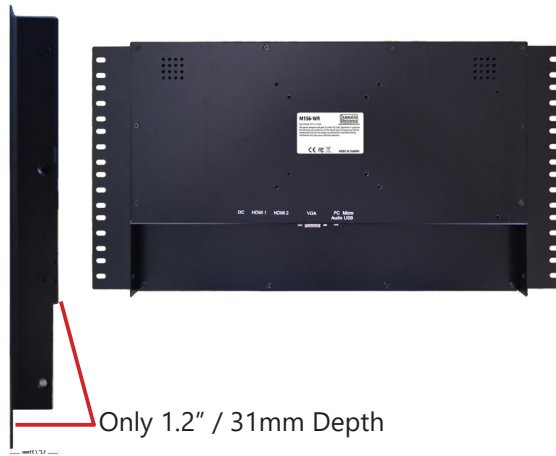

## M156-WRTS (TAA Compliant)

Durable 15.6" Full HD (1920 x 1080) LCD monitor in metal case with accurate multi-touch capabilities provides stunning and detailed picture quality.

### Benefits

- 15.6" screen is Full HD (1920 x 1080) 1080i/p with no downscaling
- 10-point Multi-touch screen (projected capacitive technology)
- LED backlight - brighter picture using less power
- Minimal depth - only 1.2" deep for mobile and areas with limited space
- Exceptional picture quality with video processing technology
- Wall mount and Rack mount capability
- TAA compliant

### Application Scenarios

- Surveillance:** Full HD display monitor with HDMI inputs for receiving NVR/DVR connections to view full detail of 1080i cameras without downscaling or loss of detail. Monitor only has 1.2" depth which is ideal for mobile or field kit applications.
- Audio Visual:** Personal size Full HD production monitor for viewing video sources either in the field or in a rack (hub).

### Similar Model

M156WR 15.6" Thin-depth without touchscreen

### Specifications

|                  |                                                                                |
|------------------|--------------------------------------------------------------------------------|
| Panel Type       | 15.6" TFT Active Matrix LCD Display                                            |
| Resolution FHD:  | 1920 x 1080                                                                    |
| Aspect Ratio     | 16:9 (native)                                                                  |
| Visible Area     | 13.55" x 7.62" / 344.16 x 193.59mm                                             |
| Backlight LED    | Yes (15K)                                                                      |
| Contrast Ratio   | 1,000:1                                                                        |
| Brightness       | 300 cd/m <sup>2</sup>                                                          |
| Display Colors   | 16.7 million                                                                   |
| Response Time    | 6ms (rising/falling)                                                           |
| Touch Capability | Projected Capacitive 10-point multi-touch                                      |
| Video Processing | Motion Adaptive 3D De-Interlace and DNR; 4H Comb Filter Y/C Separation         |
| Viewing Angle    | 89/89/89/89 (L/R/T/B)                                                          |
| HDMI             | x2                                                                             |
| RGB Analog (VGA) | x1 D-sub 15-pin                                                                |
| USB              | x1                                                                             |
| Audio            | x1 3.5mm Input (VGA);                                                          |
| Speakers         | 3 watts x 2 (rear facing)                                                      |
| Power Input      | 12V DC Input; includes external power supply                                   |
| Power Voltage    | 100 -240V AC, 50/60Hz                                                          |
| Consumption      | Active: 25 watts (max);<br>Power Saving Mode: <3 watts                         |
| Operating Temp   | 32-104° F / 0 - 40° C                                                          |
| Case             | Durable Metal                                                                  |
| Mount Wall       | 100 x 100mm (M4 x 4 holes); includes metal side wings for mounting in 19" rack |
| Dimensions       | 15" x 9.8" x 1.2" / 382 x 250 x 31mm                                           |
| Weight           | Net: 12.1lbs / 5.5kgs                                                          |

Specifications subject to change.

ToteVision Approved



TAA Compliant